

Revised
Record




1.0

New issue

2013-10-17

INTERFACE:

1	VSS
2	VCC(5.0V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	---
16	---

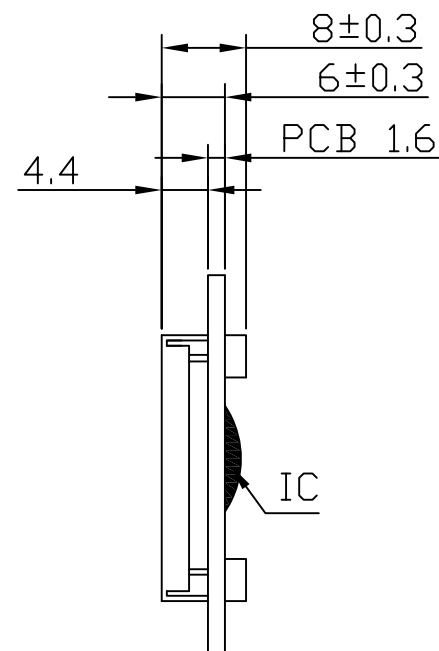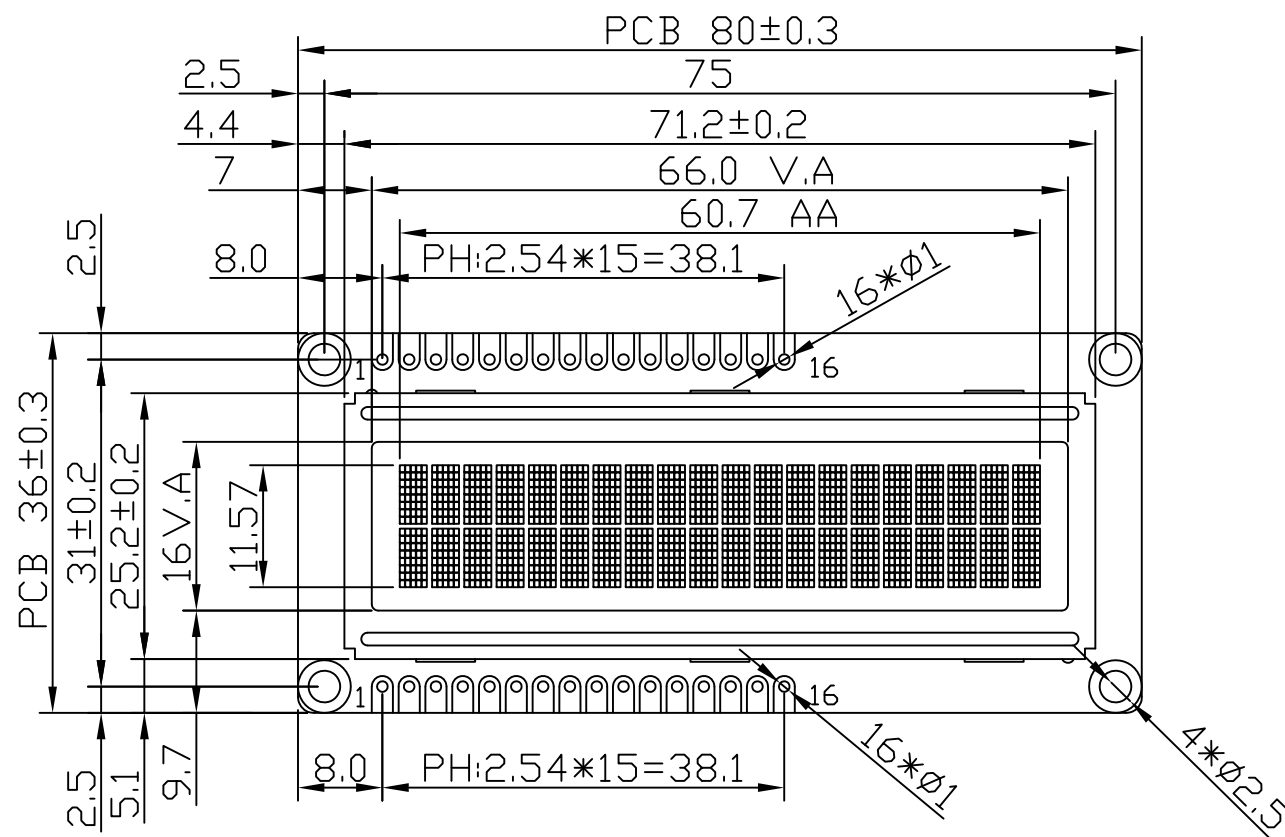

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Fonts:	
Backlight:	
Other:	

NOTES:

- DISPLAY TYPE: STN-YG/POSITIVE/REFLECTIVE RoHS
- OPERATING VOLTAGE: VOP=4.8V,VDD=5.0V
- OPERATING TEMPERATURE: -20°C~+70°C
- STORAGE TEMPERATURE: -30°C~+80°C
- DRIVE MODE: 1/16DUTY,1/5BIAS
- VIEWING DIRECTION: 6:00
- DRIVE IC: ST7066U(OR-EQV)
- CONNECTOR: ZEBER
- BACKLIGHT: ---
- CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-24

BCB2002-C01-SERIES

VERSION: 1.0

CHECKED BY: BDT-06



PAGE 1 OF 1

APPROVED BY: BDT-02

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2013-10-17