


Revised Record

1.0

New issue

2015-09-11

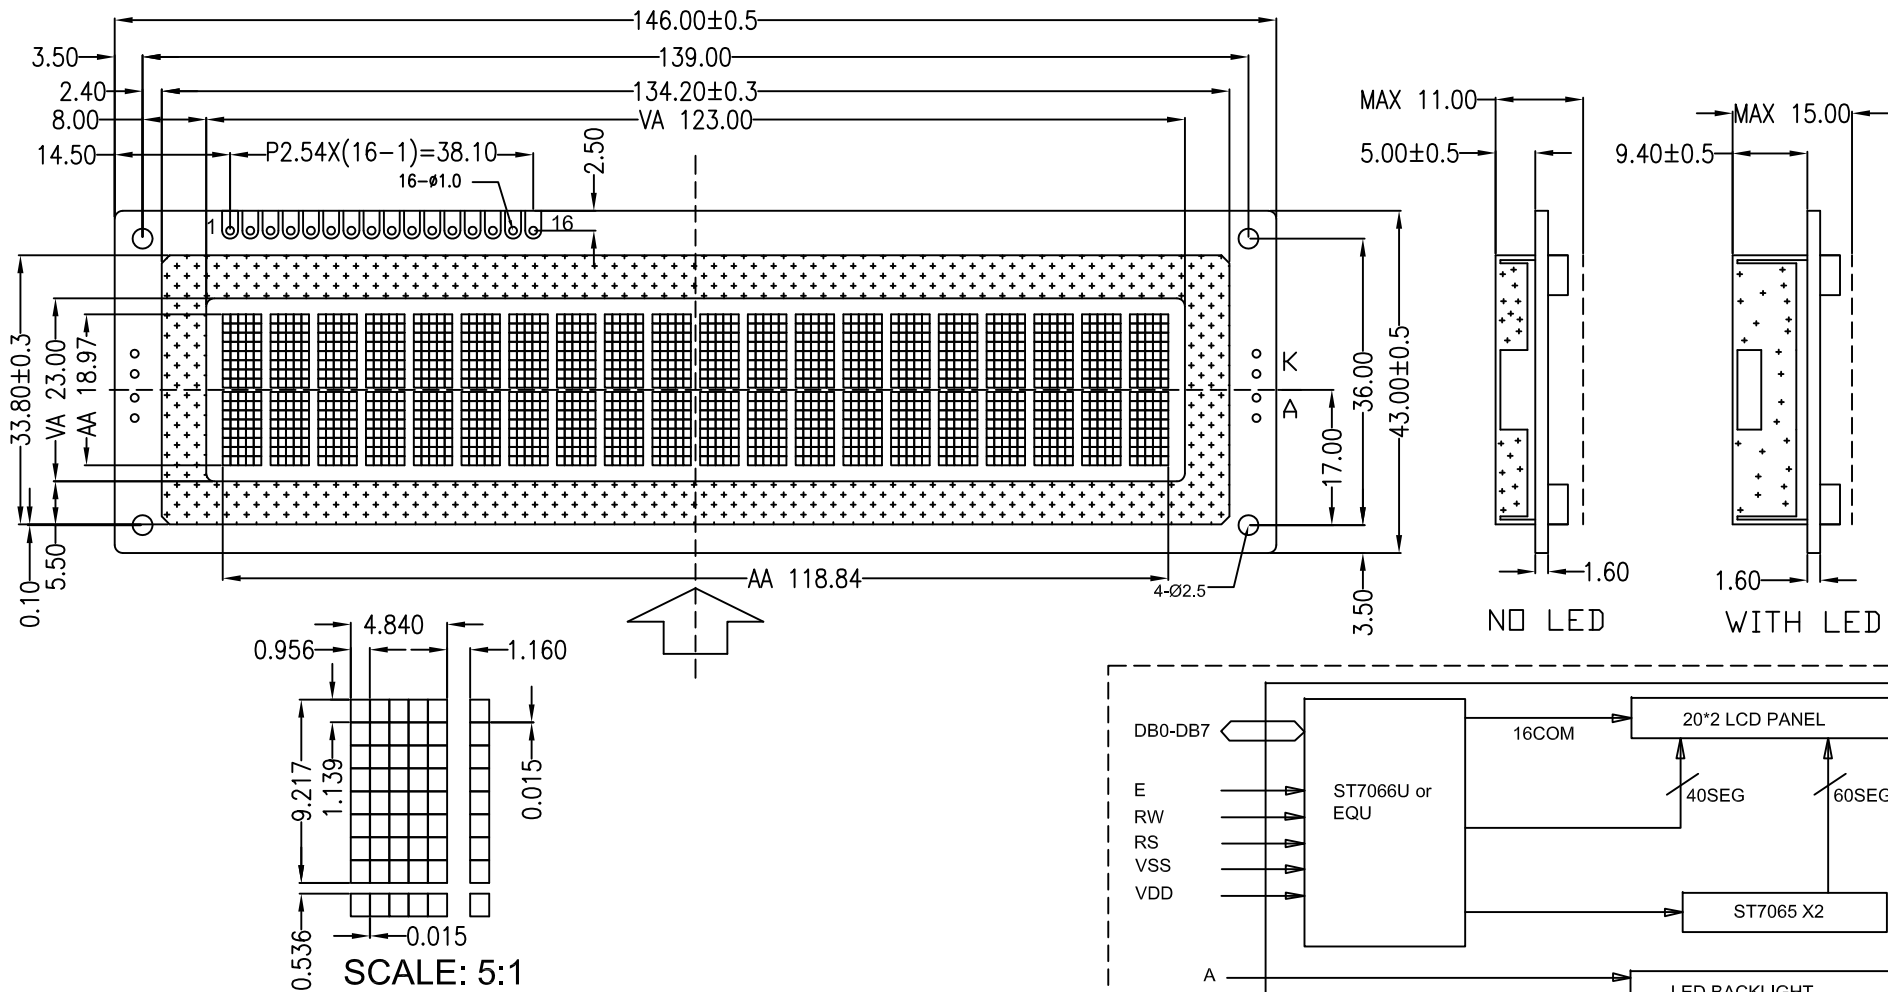


INTERFACE

1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A(5V)
16	K(0V)

NOTES:

- DISPLAY TYPE: STN/POSITIVE(YELLOW-GREEN)TRANSFLECTIVE RoHS
- OPERATING VOLTAGE: VOP=4.7V,VDD=5.0V
- OPERATING TEMPERATURE: -20°C~+70°C
- STORAGE TEMPERATURE: -30°C~+80°C
- DRIVE MODE: 1/16DUTY,1/5BIAS
- VIEWING DIRECTION: 6:00
- DRIVE IC: ST7066U-OR(EQV)
- CONNECTOR: ZEBER
- BACKLIGHT: LED(YELLOW-GREEN)
- CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT

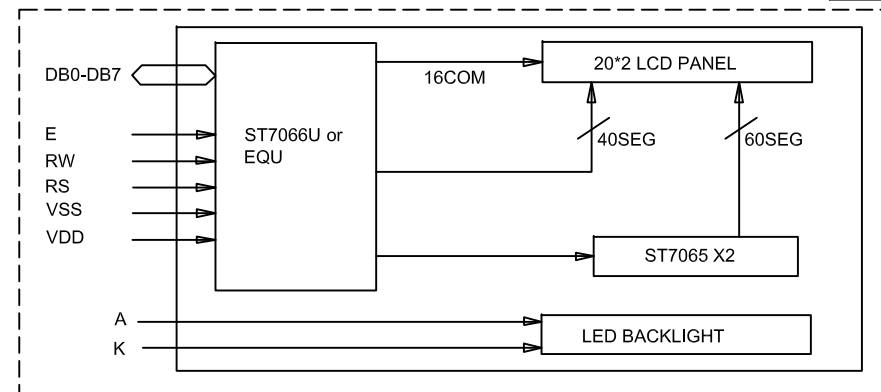


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-14

BCB2002-06-SERIES

VERSION: 1.0

CHECKED BY: BDT-08



PAGE 1 OF 1

APPROVED BY: BDT-01

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2015-09-11