



Revised Record	1.0	New issue	2017-06-05						
----------------	-----	-----------	------------	--	--	--	--	--	--

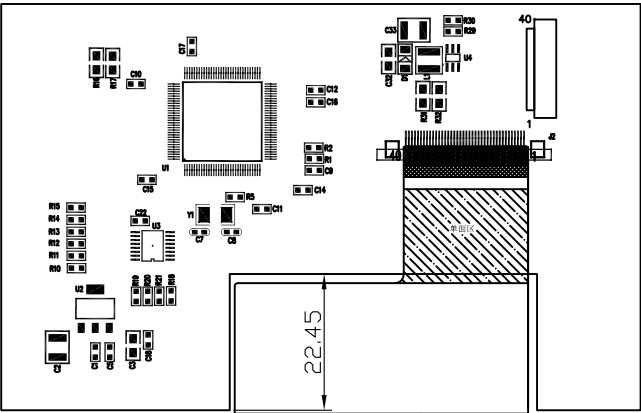

FPC INTERFACE	
1	VSS
2	VSS
3	LED-A
4	LED-K
5	/RESET
6	RS
7	/CS
8	/WR
9	/RD
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	DB8
19	DB9
20	DB10
21	DB11
22	DB12
23	DB13
24	DB14
25	DB15
26	DB16
27	DB17
28	65K
29	VSS
30	NC
31	NC
32	NC
33	NC
34	NC
35	VDD
36	VDD
37	VDD
38	VSS
39	VSS
40	VSS

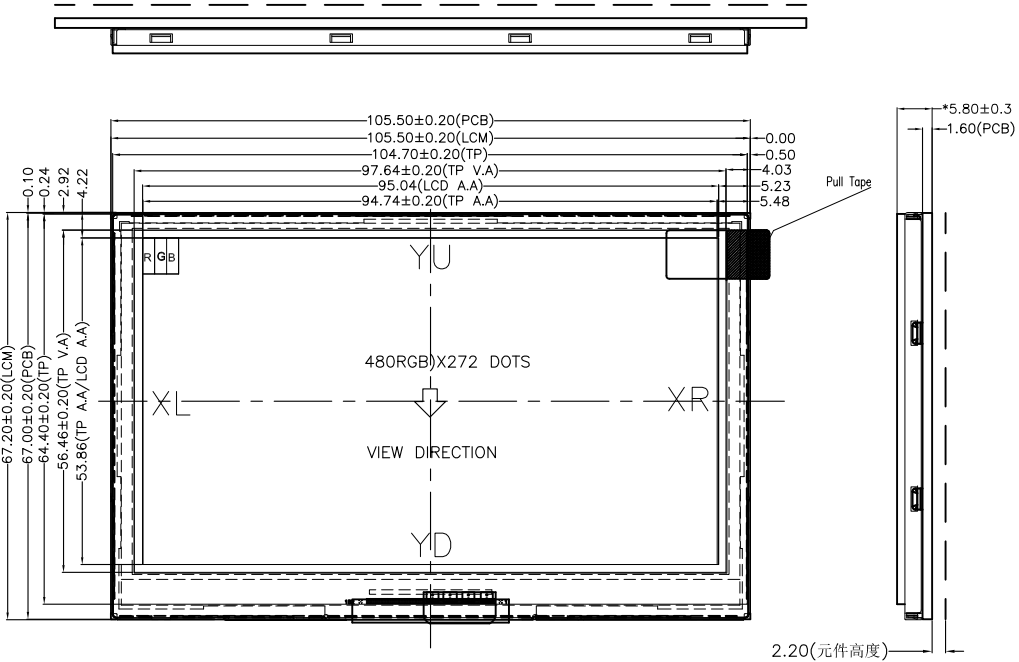

Backlight circuit
 IF:20mA, VF:24.8V

DISPLAY TYPE:	4.3" TFT	DISPLAY DRIVER:	FSA506	PIXEL PITCH:	0.198 X 0.198 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X8), 串联
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	480(RGB)X272 DOTS	STRUCTURE:	LCD+IC+FPC+BL+PCB	MATERIAL NOTE	ROHS REQUEST

Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-36	BDT-T4340-05-DARFT	VERSION: 1.0
CHECKED BY: BDT-10		PAGE 1 OF 1
APPROVED BY: BDT-05		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2017-06-05