




Revised Record	1.0	New Issue	2014-06-27						

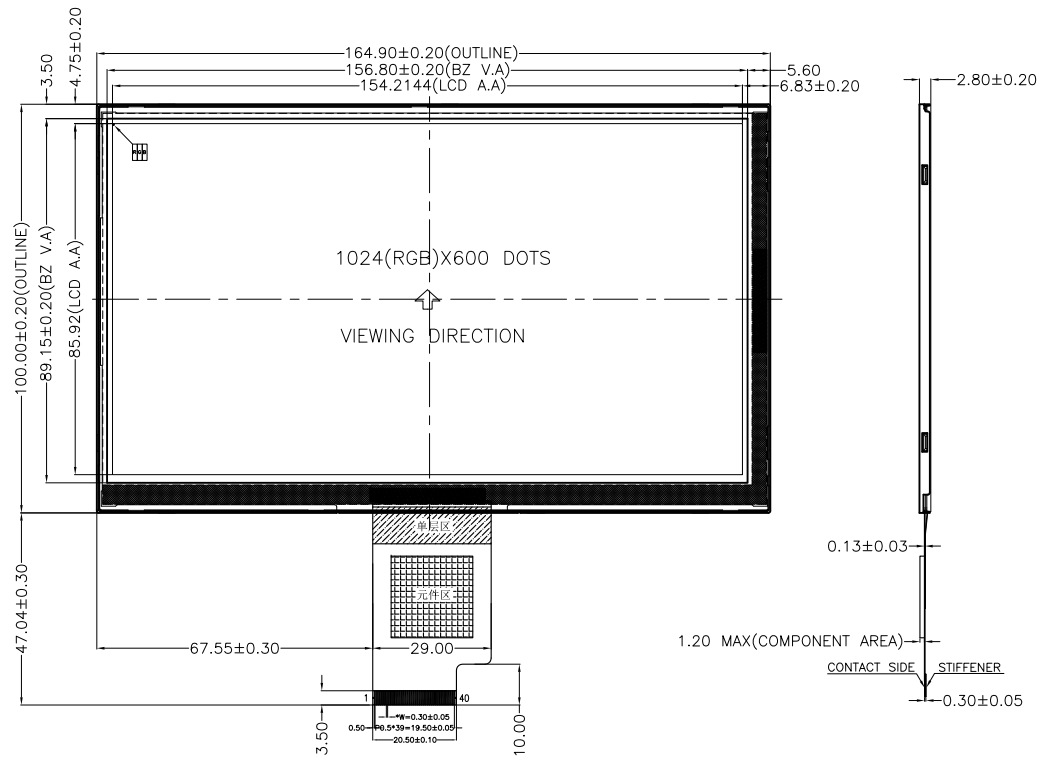

Backlight Circuit:





Vf=9.6V(TYP). If=160mA

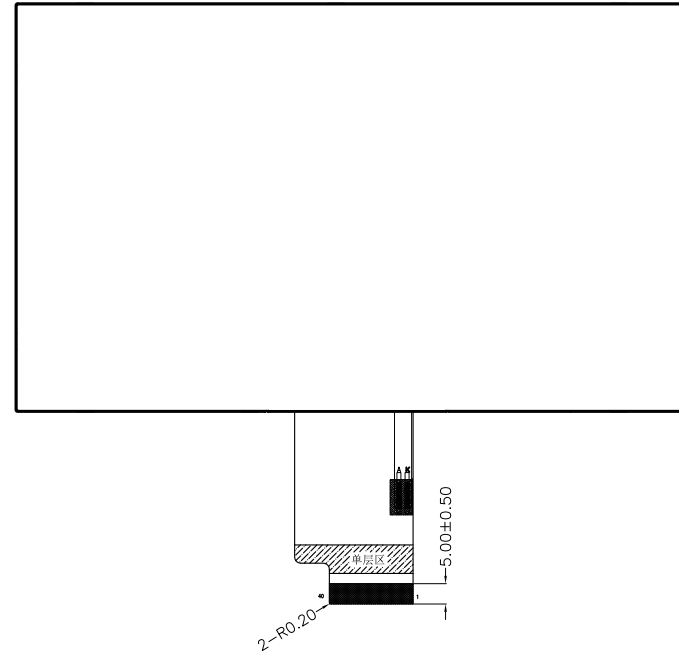

PIN	Explanation
1	VCOM
2	DVDD
3	DVDD
4	NC
5	RESET
6	STBYB
7	GND
8	NIND0
9	PIND0
10	GND
11	NIND1
12	PIND1
13	GND
14	NIND2
15	PIND2
16	GND
17	NINC
18	PINC
19	GND
20	NIND3
21	PIND3
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	SHLR
34	UPDN
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+

DISPLAY TYPE:	7.0" TFT	DISPLAY DRIVER:	ILI5120-9G & ILI6150C-9G	PIXEL PITCH:	0.1506 X 0.1432 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X24),3串*8并
VIEWING DIRECTION:	FFS MODE	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	1024(RGB)X600 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-23	BDT-T7040-04-SERIES	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-05		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2014-06-27