
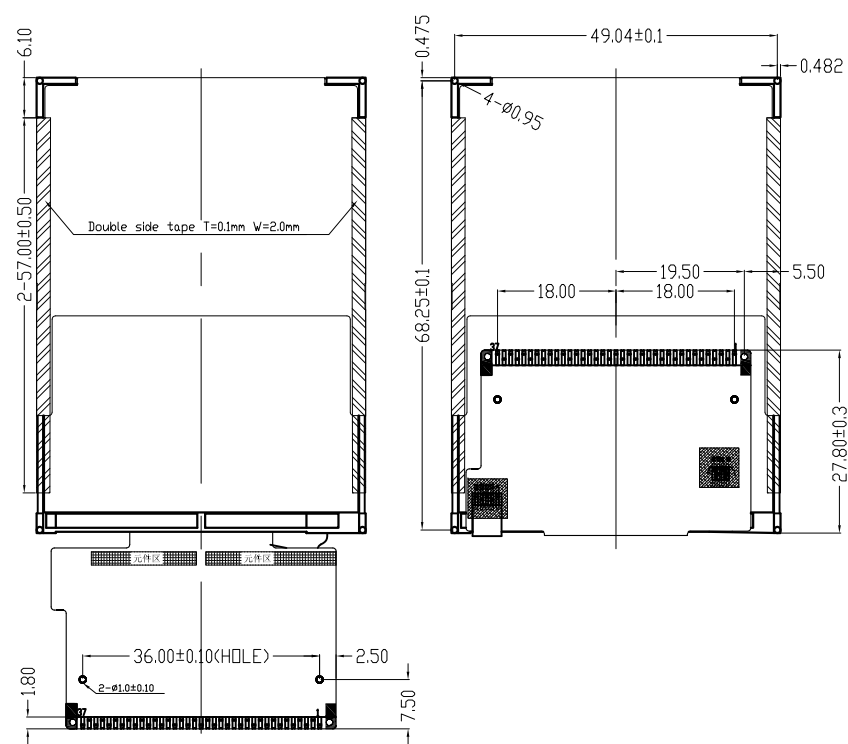



Revised Record	1.0	New Issue	2015-09-28						

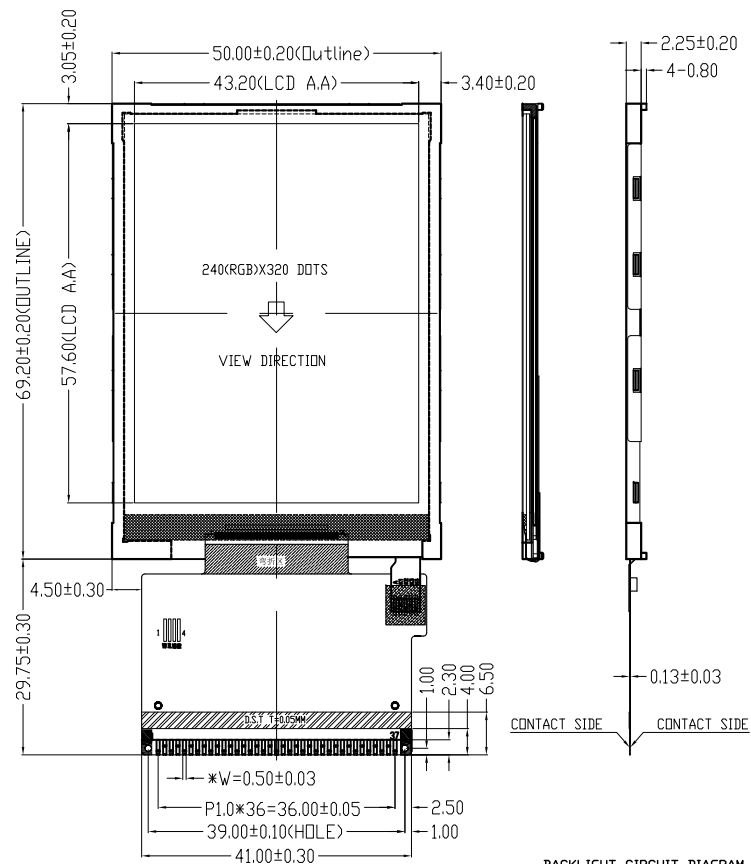

FPC INTERFACE

1	DB0
2	DB1
3	DB2
4	DB3
5	GND1
6	VCC1
7	/CS
8	RS
9	/WR
10	/RD
11	NC
12	NC
13	NC
14	NC
15	NC
16	LEDA
17	LEDK1
18	LEDK2
19	LEDK3
20	LEDK4
21	NC
22	DB4
23	DB10
24	DB11
25	DB12
26	DB13
27	DB14
28	DB15
29	DB16
30	DB17
31	/RESET
32	VCI
33	VCC2
34	GND
35	DB5
36	DB6
37	DB7

DISPLAY TYPE:	2.8" TFT	DISPLAY DRIVER:	ILI9341V	PIXEL PITCH:	0.180 X 0.180 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X4), 并联
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	240(RGB)X320 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-23	BDT-T2837-02-SERIES	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-05		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2015-09-28