

Revised Record




1.0

New issue

2011-10-17

INTERFACE

1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

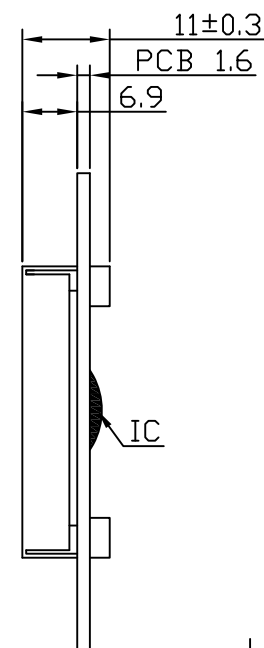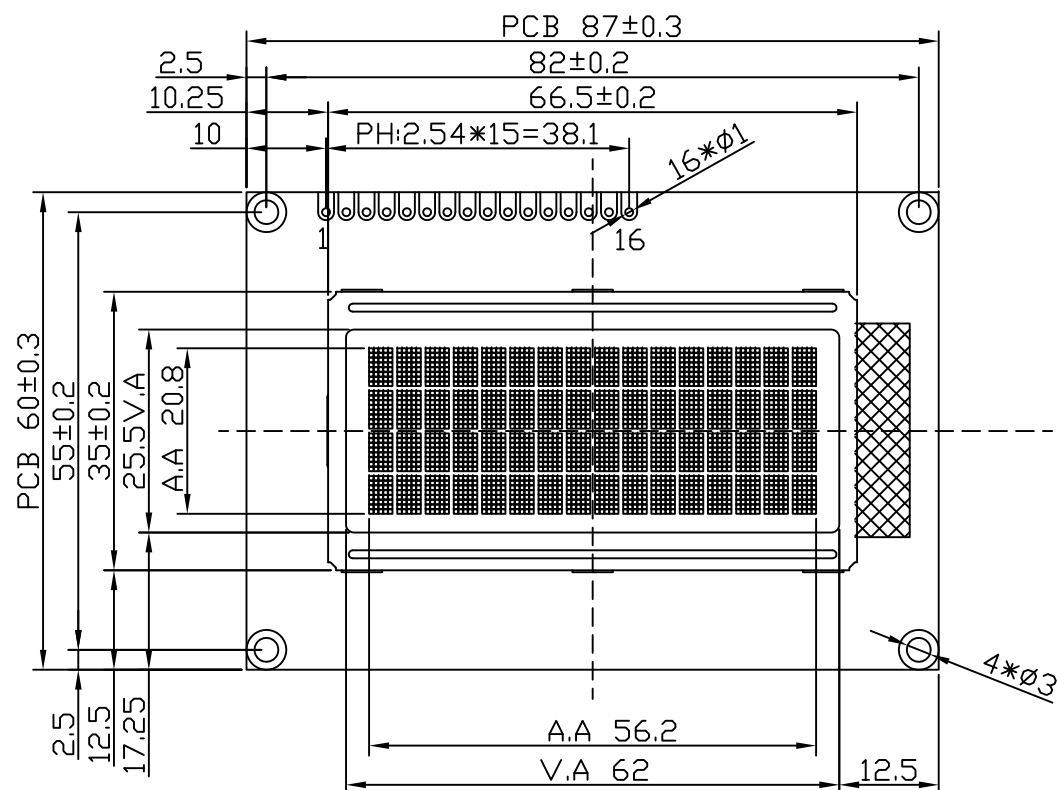

DOT SIZE:

NOTES:

- DISPLAY TYPE: STN/NEGATIVE(BLUE)/TRANSMISSIVE RoHS
- OPERATING VOLTAGE: VOP=5.0V,VDD=5.0V
- OPERATING TEMPERATURE: -20°C~+70°C
- STORAGE TEMPERATURE: -30°C~+80°C
- DRIVE MODE: 1/16DUTY,1/5BIAS
- VIEWING DIRECTION: 6:00
- DRIVE IC: SPLC780D
- CONNECTOR: ZEBER
- BACKLIGHT: LED(WHITE)
- CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-12

BCB1604-01B-SERIES

VERSION: 1.0

CHECKED BY: BDT-07



PAGE 1 OF 1

APPROVED BY: BDT-02

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2011-10-17