

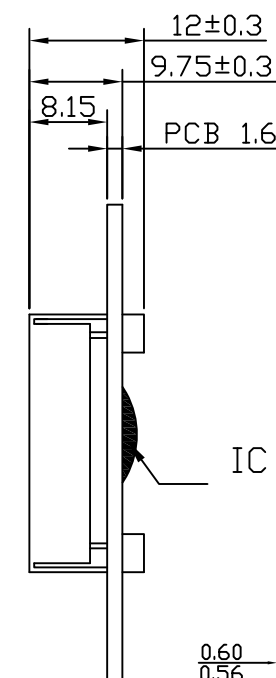


Revised Record	1.0	New issue	2010-09-21						

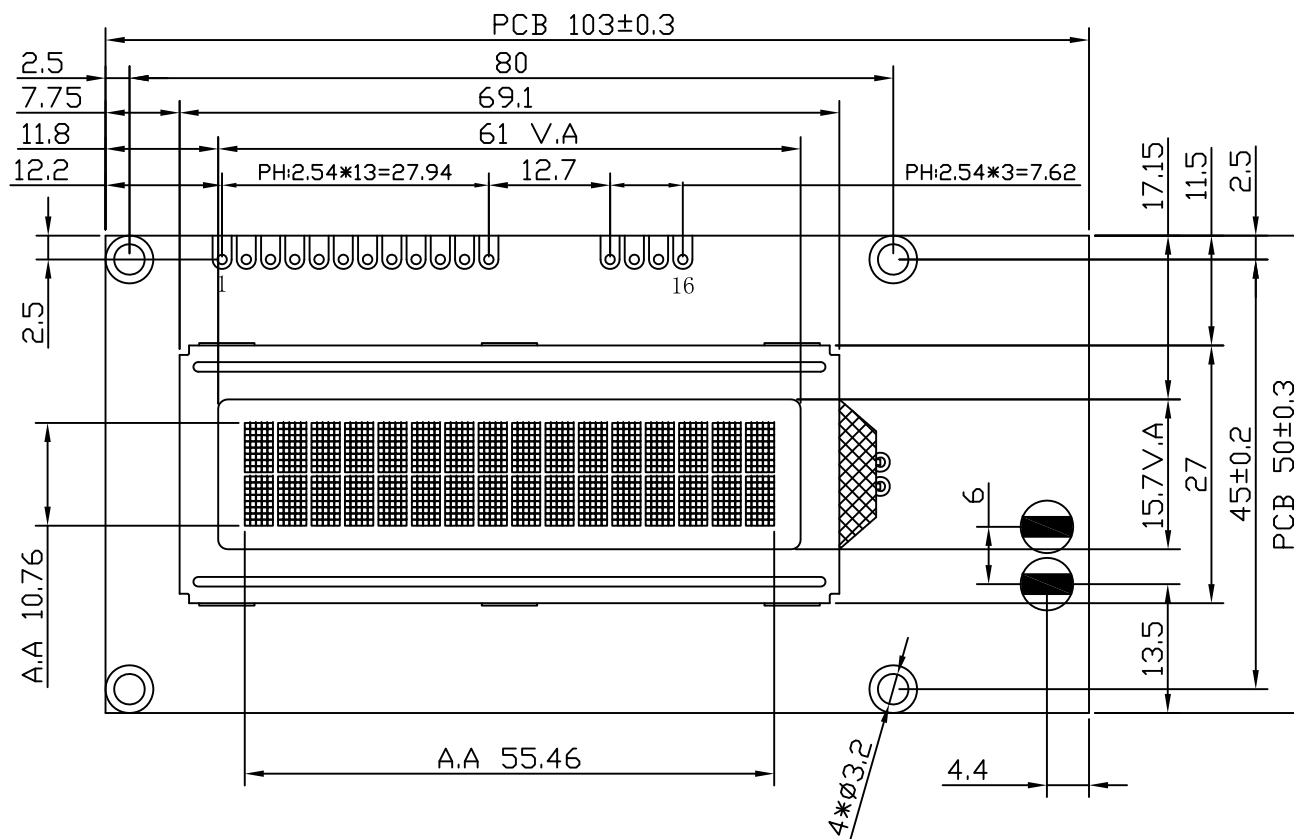

INTERFACE	
1	VDD(5V)
2	BLA
3	LED
4	VSS
5	N.C
6	RW
7	RS
8	E
9	DB4
10	DB5
11	DB6
12	DB7
13	DB0
14	DB1
15	DB2
16	DB3



DOT SIZE:

NOTES:

- | | | |
|----------------------------|---------------------------------|------|
| 01. DISPLAY TYPE: | STN/NEGATIVE(BLUE)/TRANSMISSIVE | RoHS |
| 02. OPERATING VOLTAGE: | VOP=4.7V,VDD=5.0V | |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C | |
| 04. STORAGE TEMPERATURE: | -30°C~+80°C | |
| 05. DRIVE MODE: | 1/16DUTY,1/5BIAS | |
| 06. VIEWING DIRECTION: | 6:00 | |
| 07. DRIVE IC: | SPLC780D | |
| 08. CONNECTOR: | ZEBER | |
| 09. BACKLIGHT: | LED(WHITE) | |
| 10. CUSTOMER'S PART ID: | BLAZE_STANDARD_PRODUCT | |

BLAZE Blaze Display Technology Co., Ltd.

DESIGNED BY: BDT-27		VERSION: 1.0
CHECKED BY: BDT-03		PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2010-09-21