


Revised Record

1.0

New issue


2007-01-18

VIEWING DIRECTION

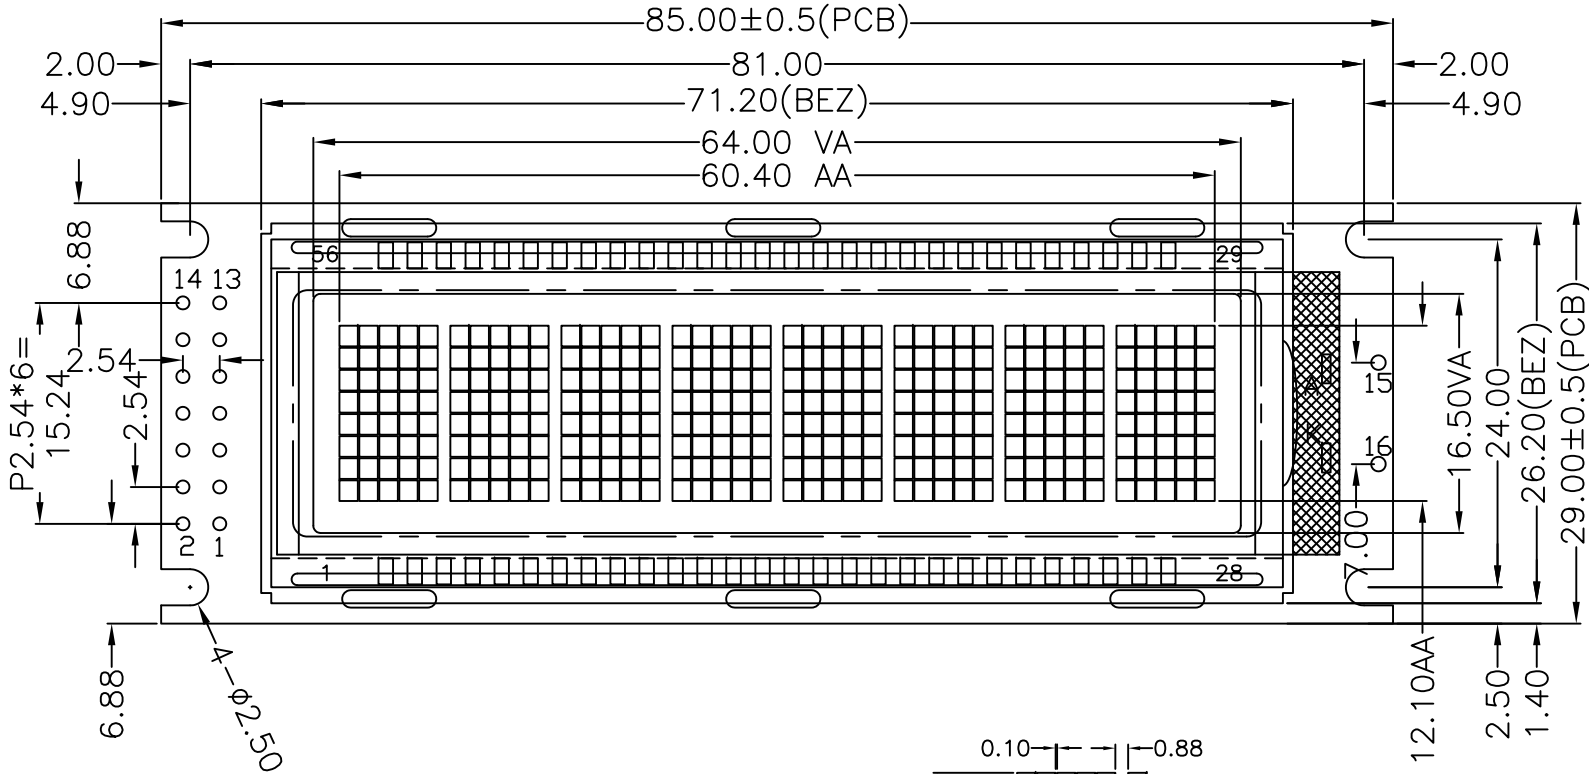


INTERFACE:

1	VDD
2	VSS
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A
16	LED-K

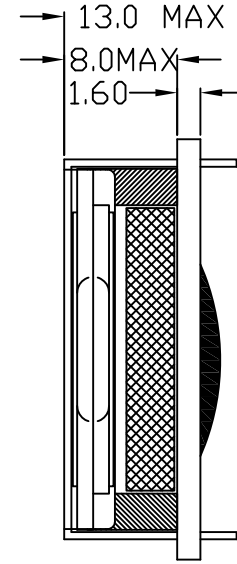

Customer's Choices:



DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Fonts:	
Backlight:	
Other:	



NOTES:

- | | |
|---------------------------|-------------------------------------|
| 1. DISPLAY TYPE: | STN/NEGATIVE/TRANSMISSIVE/BLUE RoHS |
| 2. OPERATING VOLTAGE: | VOP:4.7V,VDD=5.0V |
| 3. OPERATING TEMPERATURE: | -20°C~+70°C |
| 4. STORAGE TEMPERATURE: | -30°C~+80°C |
| 5. DRIVE MODE: | 1/16Duty,1/5Bias |
| 6. VIEWING DIRECTION: | 6:00 |
| 7. DRIVE IC: | ST7066U(OR-EQV) |
| 8. BACKLIGHT: | LED(WHITE) |
| 9. CUSTOMER No.: | |

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-36	BCB0801-03	VERSION: 1.0
CHECKED BY: BDT-07	 	PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2007-01-18