Revised Record									
	1.0	New issue	2015-03-13						

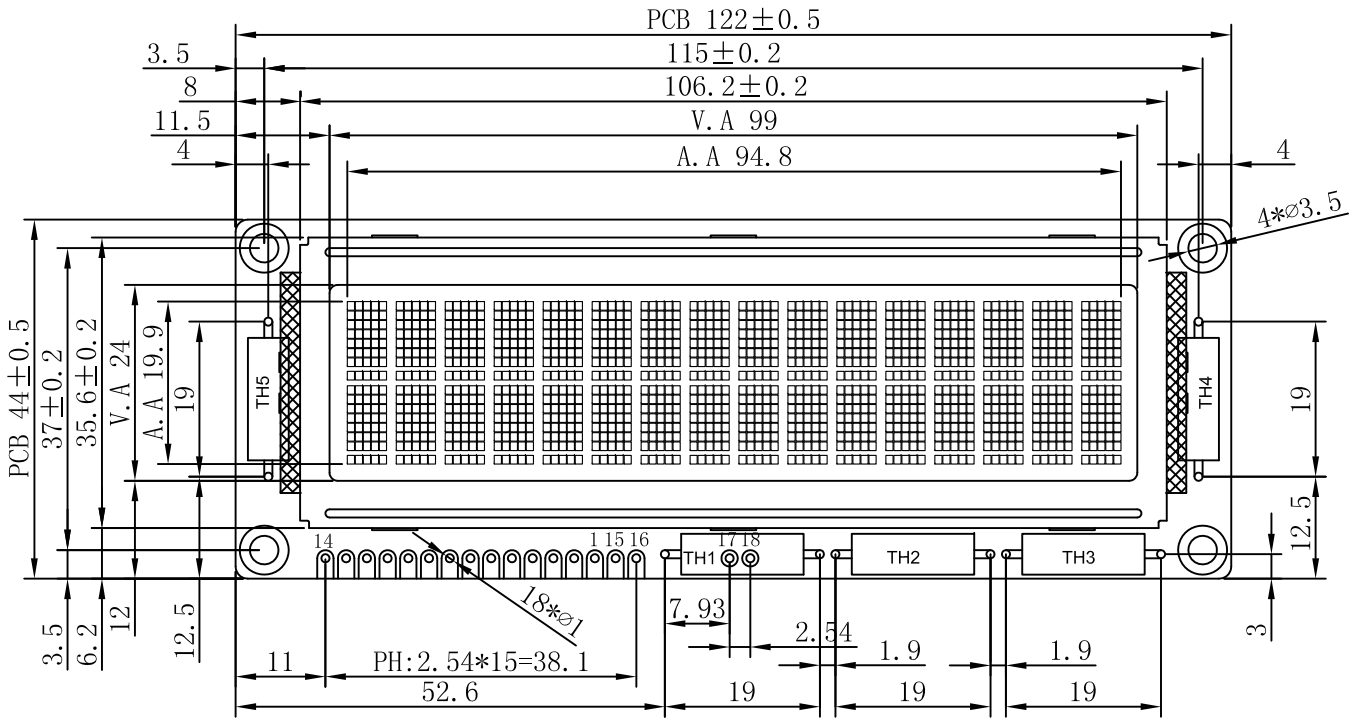

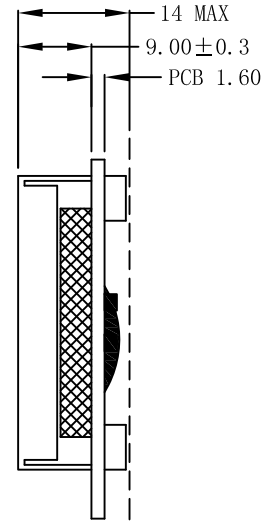

INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K
17	VH+
18	VH-





DOT SIZE:

NOTES:

01.	DISPLAY TYPE:	STN(YELLOW-GREEN)/POSITIVE/TRANSFLECTIVE RoHS
02.	OPERATING VOLTAGE:	VOP=4.8V,VDD=5.0V
03.	OPERATING TEMPERATURE:	-20°C~+70°C
04.	STORAGE TEMPERATURE:	-30°C~+80°C
05.	DRIVE MODE:	1/16DUTY,1/5BIAS
06.	VIEWING DIRECTION:	6:00
07.	DRIVE IC:	AIP31066(EQV.)
08.	CONNECTOR:	ZEBER
09.	BACKLIGHT:	LED(Y-G),I=80MA,SUNLIGHT_READABLE
10.	CUSTOMER'S PART ID:	BLAZE_STANDARD_PRODUCT

Blaze Display Technology Co.,Ltd.		
DESIGNED BY: BDT-29	BCB1602-11-SERIES	VERSION: 1.0
CHECKED BY: BDT-07		PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website:http://www.blazedisplay.com		DATE: 2015-03-13