


Revised Record


1.0

New issue


2014-04-22

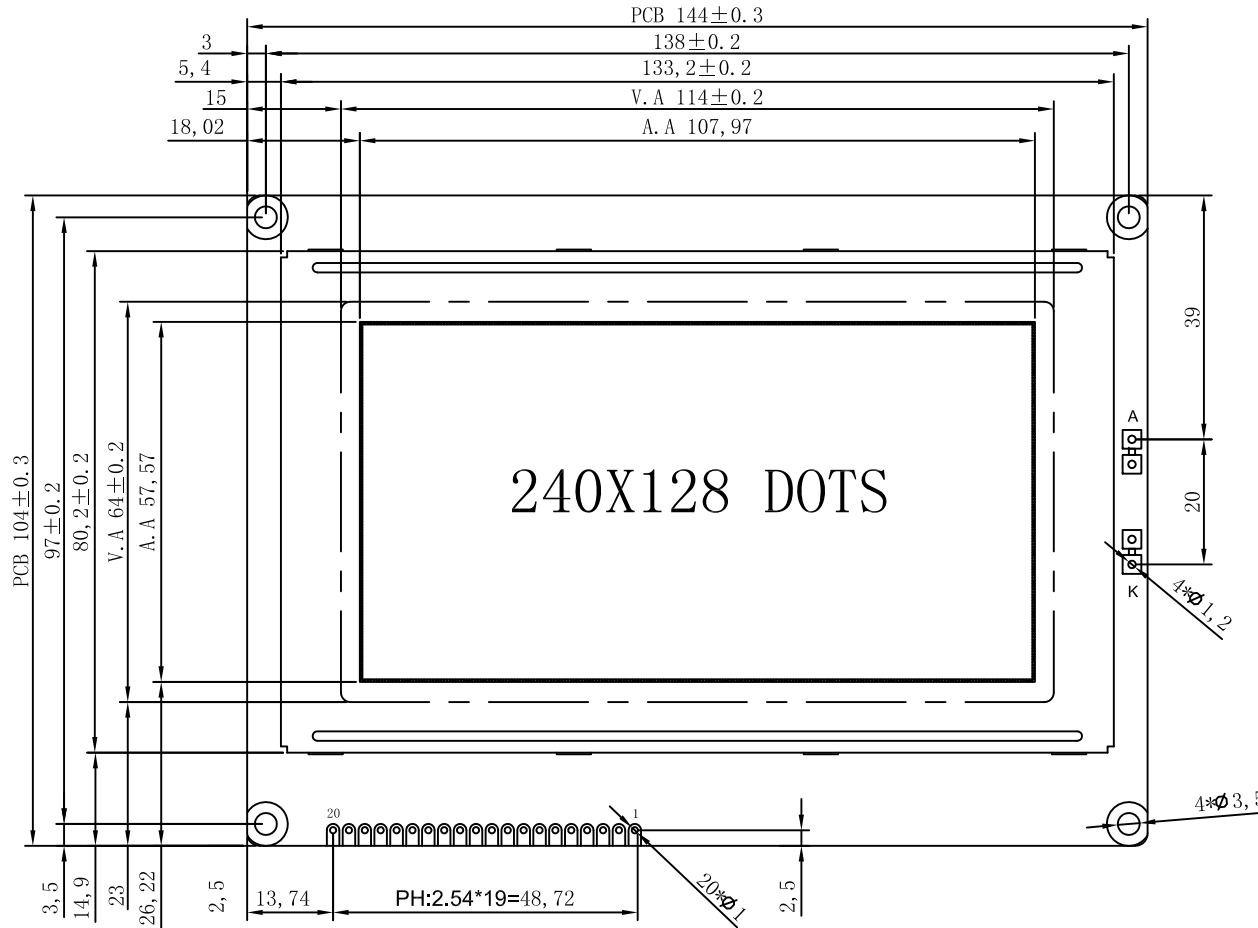

240X128 DOTS



DOT SIZE

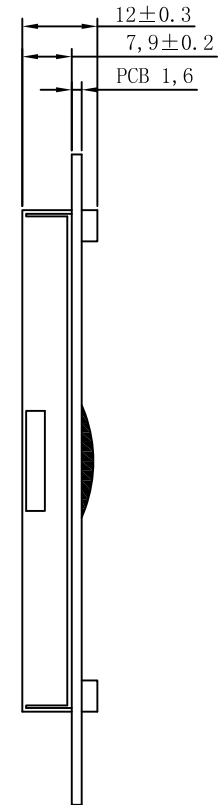

INTERFACE:

1	VSS
2	VDD(5V)
3	V0
4	C/D
5	/RD
6	/WR
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CE
16	/RESET
17	VEE
18	MD2
19	FS1
20	N.C
	A(5V)
	K(0V)

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Backlight:	
Other:	

NOTES:

- 01. DISPLAY TYPE: STN-BLUE, POSITIVE/TRANSMISSIVE RoHS
- 02. OPERATING VOLTAGE: VOP=18.0V, VDD=5.0V
- 03. OPERATING TEMPERATURE: -20°C~+70°C
- 04. STORAGE TEMPERATURE: -30°C~+80°C
- 05. DRIVE MODE: 1/128DUTY, 1/12BIAS
- 06. VIEWING DIRECTION: 6:00
- 07. DRIVE IC: RA6963(OR-EQV)
- 08. CONNECTOR: ZEBRA
- 09. BACKLIGHT: LED(WHITE), I=120MA
- 10. CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT

BLAZE Blaze Display Technology Co., Ltd.

DESIGNED BY: BDT-33	BCB240128-02B-SERIES	VERSION: 1.0
CHECKED BY: BDT-04		PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2014-04-22