


Revised Record


1.0 New Issue

2015-10-23

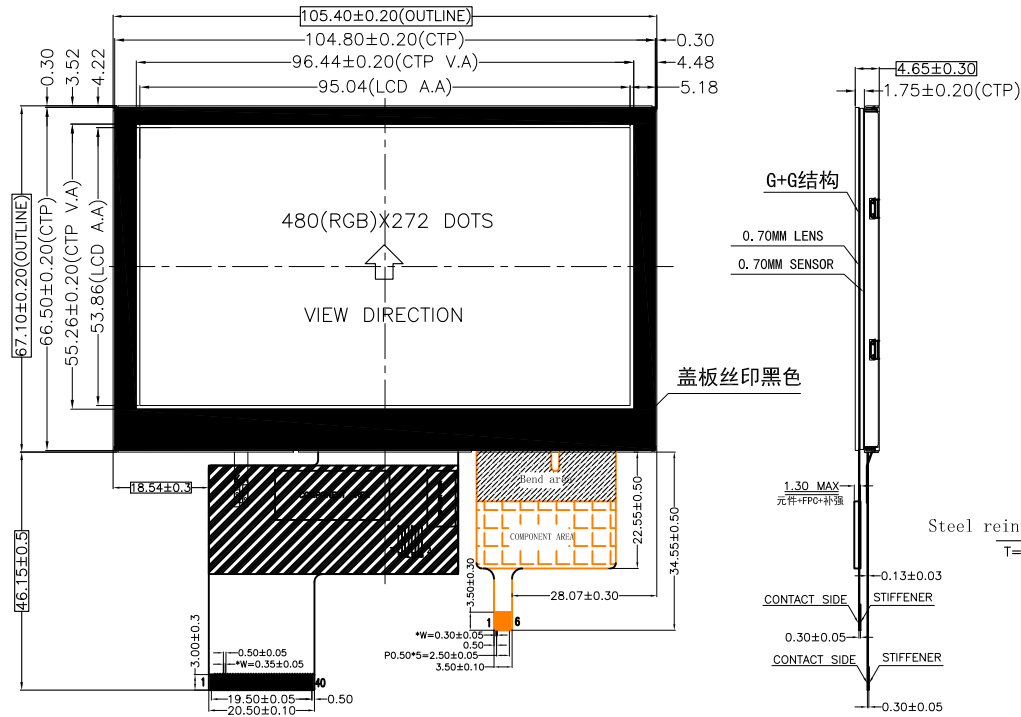

FPC INTERFACE


1	K
2	A
3	NC
4	DVDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR(NC)
38	YD(NC)
39	XL(NC)
40	YU(NC)

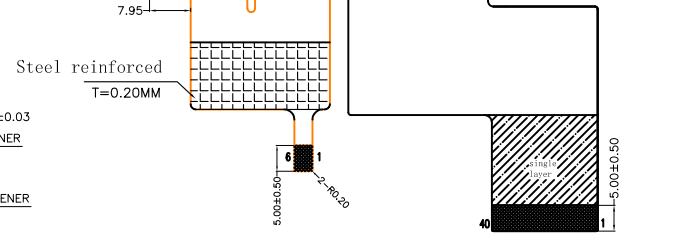

CTP TouchPanel interface

PIN NO.	DINFINATION
1	INT
2	DATA
3	CLK
4	RST
5	GND
6	VDD

Backlight circuit:



DISPLAY TYPE:	4.3" TFT	DISPLAY DRIVER:	ILI6480H	PIXEL PITCH:	0.198 X 0.198 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	LCM BRIGHTNESS (CD/M <sup>2</sup> ):	290(MIN)/320(TYP)
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C	BACK LIGHT:	Series connection LED WHITE(X7),
Dot matrix:	480(RGB)X272 DOTS	STRUCTURE:	LCD+IC+FPC+BL+CTP	MATERIAL NOTE	ROHS REQUEST

**BLAZE** Blaze Display Technology Co., Ltd.

DESIGNED BY: BDT-23 BDT-T4340-04-SERIES (CTP) VERSION: 1.0

CHECKED BY: BDT-09   PAGE 1 OF 1

APPROVED BY: BDT-05 UNIT: mm

Website: <http://www.blazedisplay.com> DATE: 2015-10-23